

16Z250

Radial Leaded PTC Resettable Fuse

Summary

- RoHS Compliant (Lead Free) Product
- Applications: Wide variety of electronic equipment
- Product Features: Low hold current, Solid state, Radial leaded product ideal for up to 16V
- Operation Current: 2.5 A
- Maximum Voltage: 16 V
- Temperature Range : -40°C to 85°C

Electrical characteristics (23°C)

Part Number	Hold Current	Trip Current	Max.Time to Trip	Maximum Current	Rated Voltage	Typical Power	Resistance Tolerance	
	IH, A	IT, A	at 5xIH	IMAX, A	VMAX, Vdc	Pd, W	RMIN	RMAX
	ohms	ohms						
16Z250	2.5	5.0	10	40	16	1.21	0.025	0.052

I_H - Hold current-maximum current at which the device will not trip at 23 °C still air.

I_T - Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX} - Maximum voltage device can withstand without damage at its rated current.

I_{MAX} - Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).

P_d - Typical power dissipated from device when in tripped state in 23°C still air environment.

R_{MIN} - Minimum device resistance at 23°C.

R_{1MAX} - Maximum device resistance at 23 °C, 1 hour after tripping .


Physical specifications:

Lead material: Tin plated copper, 24 AWG.

Soldering characteristics: MIL-STD-202, Method 208E.


Insulating coating: Flame retardant epoxy, meets UL -94V-0 requirement.

Production Dimensions (millimetre)



Part Number	A	B	C	D	E	Lead
	Maximum	Maximum	Typical	Minimum	Maximum	Φ
16Z250	11.5	18.4	5.1	7.6	3.0	0.6

Thermal Derating Curve

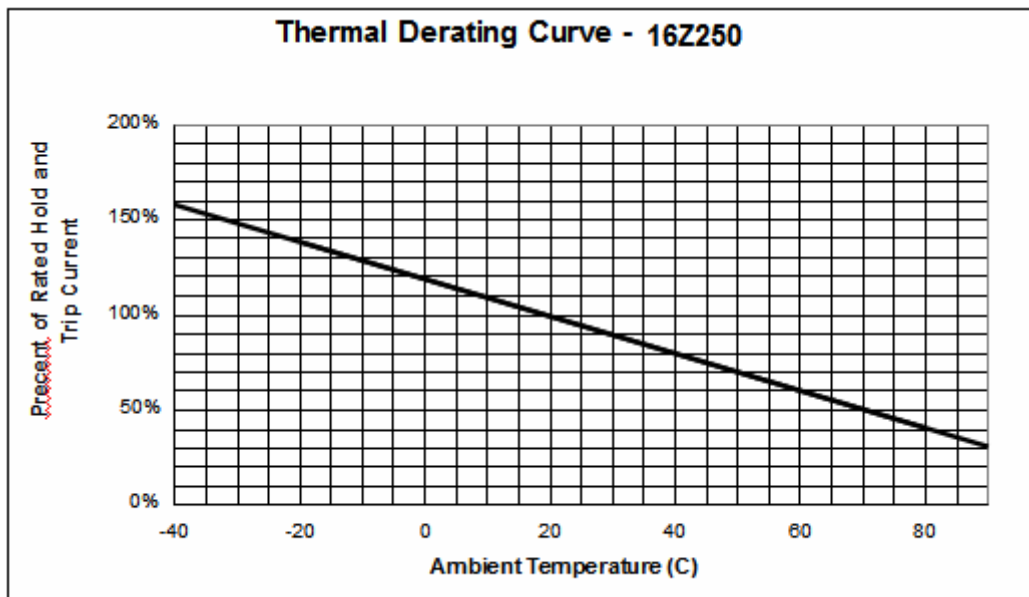

Typical Time-To-Trip at 23°C

